Project portfolio

20 selected construction, electromechanical installation and fabrication projects for industry.

58	7	4
YEARS · 1968	COUNTRIES WITH PROJECTS	OFFICES

Building industry with people who deliver, since 1968.

GRUPO HL, FORMERLY HL INGENIEROS · HL INGENIEROS S.A. · HLINGENIEROS.COM

Cement



New Cementos Progreso Plant

Installation of the mechanical equipment in the clinkering area of a 4,500 t/day cement plant in Guatemala.

CLIENT thyssenkrupp Industrial Solutions
LOCATION San Juan Sacatepéquez, Guatemala
DURATION 26 months
SERVICES Mechanical and piping installation

1,200,000 man-hours
Man-hours

11,700 t
Equipment installed

4,500 t/day
Plant capacity

26 months
Duration



Columbus Plant

Design, construction, installation and commissioning of a 5,250 t/day cement plant in Cartagena.

CLIENT Cementos Argos
LOCATION Cartagena, Colombia
HL'S ROLE Consortium
DURATION 42 months
SERVICES EPC and turnkey · Industrial civil works · Mechanical and piping installation · Electrical installation and instrumentation

9,470,000 man-hours
Man-hours

5,250 t/day
Cement production capacity

95,000 m³
Concrete

8,300 t
Structural steel

CEMENT

Cementos Diamante Lines 1 and 2

Management, fabrication and electromechanical installation of lines 1 and 2.

CLIENT Cementos Diamante
SERVICES Project management · Metal fabrication · Mechanical and piping installation · Electrical installation and instrumentation

CEMENT

Caracolito Baghouse

Conversion of an electrostatic precipitator into a baghouse; production restarted one day early.

CLIENT Cemex

SERVICES Mechanical and piping installation · Maintenance and plant shutdowns

1 day

Production restarted ahead of schedule



Sonsón Cement Grinding

Mechanical installation of the cement grinding, bagging and palletizing areas.

CLIENT OHL Industrial Colombia

LOCATION Sonsón, Colombia

DURATION 9 months

SERVICES Mechanical and piping installation

225,000 man-hours

Man-hours

9 months

Duration

600 t

Vertical cement mill



Chimborazo Cement Plant

Slipform construction of the 105 m preheater tower and a 65 m silo.

CLIENT UTE Chimborazo (Sacyr, Imasa, Polysius)

LOCATION Riobamba, Ecuador

DURATION 6 months

SERVICES Industrial civil works

105 m

Slipformed preheater tower

8,100 m³

Concrete

1,900 t

Reinforcing steel

390,000 man-hours

Man-hours

CEMENT

Maceo Plant Tower Crane

Erection of the tower crane for the new Maceo plant, in 30% less time.

SERVICES Mechanical and piping installation

30%

Less installation time

Mining

MINING

Buriticá Process Plant

Mechanical, electrical and instrumentation installation for the Buriticá mining project process plant.

CLIENT Continental Gold

LOCATION Buriticá, Colombia

DURATION 18 months

SERVICES Mechanical and piping installation · Electrical installation and instrumentation

750,000 man-hours

Man-hours

2,900 t

Equipment

2,200 t

Structural steel

2,400 units

Instruments

MINING

Cerrejón Shiploader Repair


Repair of the shiploader, delivered 3 days early.

CLIENT Carbones del Cerrejón

SERVICES Maintenance and plant shutdowns

3 days

Delivered ahead of schedule

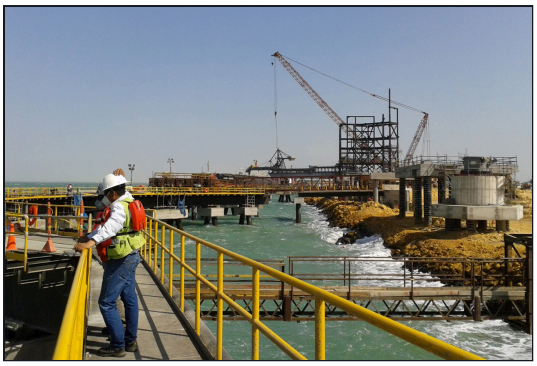

Puerto Bolívar Marine Works

Electromechanical installation of conveyors, transfer towers and marine works at Cerrejón's port.

CLIENT Carbones del Cerrejón
LOCATION Puerto Bolívar, Colombia
DURATION 7 months
SERVICES Mechanical and piping installation · Electrical installation and instrumentation

1,100 m
Onshore and offshore conveyor

1,300 t
Structure

77,000 m
Low- and medium-voltage and control cables

390,000 man-hours
Man-hours

Water and energy



El Salitre WWTP, Phases 1, 3 and 4

Mechanical installation of piping and equipment for phases 1, 3 and 4 of the El Salitre wastewater treatment plant.

CLIENT Consorcio PTAR Salitre
LOCATION Bogotá, Colombia
DURATION 12 months
SERVICES Mechanical and piping installation · Metal fabrication

92,000 inch-diameters
Carbon and stainless steel piping

770 t
Equipment

183 units
Gates

305,000 man-hours
Man-hours

WATER AND ENERGY

Termonorte Thermal Power Plant

Civil works and construction of a 93 MW dual-fuel, open-cycle power plant.

CLIENT Hyundai Heavy Industries
LOCATION Santa Marta, Colombia
DURATION 12 months
SERVICES Industrial civil works

93 MW
Generating capacity

4,500 m³
Concrete

475 t
Structural steel

210,000 man-hours
Man-hours



Bello WWTP Digesters

Installation, testing and commissioning support for 6 egg-shaped steel sludge digesters.

CLIENT Consorcio de Aguas de Aburrá HHA
LOCATION Bello, Colombia
DURATION 12 months
SERVICES Mechanical and piping installation

6 units
Egg-shaped digesters

3,000 t
Tank plates and auxiliary equipment

46,000 inch-diameters
Piping

750,000 man-hours
Man-hours

Oil and gas

OIL AND GAS

GACE IV Project

Civil, mechanical, piping, electrical and instrumentation construction for the Asociación Guajira GACE IV project.

CLIENT Chevron Petroleum Company
LOCATION Campo Ballenas, Colombia
DURATION 13 months
SERVICES Industrial civil works · Mechanical and piping installation · Electrical installation and instrumentation

253,720 man-hours
Man-hours

13 months
Duration

OIL AND GAS

Chuchupa A and B Platforms

Critical chain planning of the offshore work on the Chuchupa A and B platforms, with no lost time and no incidents.

CLIENT Chevron
SERVICES Project management

0%
Lost time

0
Incidents

Infrastructure

INFRASTRUCTURE

Barrancabermeja Terminal

Installation of the fire protection and lighting systems at Impala's terminal in Barrancabermeja.

CLIENT	Impala Terminals Barrancabermeja
LOCATION	Barrancabermeja, Colombia
DURATION	14 months
SERVICES	Mechanical and piping installation · Electrical installation and instrumentation

37,000 man-hours
Man-hours

14 months
Duration

INFRASTRUCTURE

Chipirón Platform Access Road

Construction of the access road to the Chipirón T-B platform, with no environmental incidents.

CLIENT	Estrumetal
LOCATION	Caño Limón, Colombia
DURATION	15 months
SERVICES	Industrial civil works

251,006 man-hours
Man-hours

15 months
Duration

0
Environmental incidents

Industrial



Diana Pet Food Production Plant

Civil works for the new industrial plant and its offices in Tocancipá.

CLIENT	Diana Pet Food Colombia
LOCATION	Tocancipá, Colombia
DURATION	8 months
SERVICES	Industrial civil works

2,300 m³
Concrete

5,900 m³
Excavation

357 t
Structural steel

90,000 man-hours
Man-hours

INDUSTRIAL

Ladrillera Santa Fe Block Plant

Supply, fabrication and electromechanical installation of the clay block plant.

CLIENT	Ladrillera Santa Fe
SERVICES	Metal fabrication · Mechanical and piping installation · Electrical installation and instrumentation

INDUSTRIAL

Project Charlotte

Electromechanical installation of Unilever's home and personal care process and packaging lines in Palmira.

CLIENT	Unilever Colombia
LOCATION	Palmira, Colombia
DURATION	9 months
SERVICES	Mechanical and piping installation · Electrical installation and instrumentation

290 units
Equipment

900 units
Instruments

15,000 inch-diameters
Carbon and stainless steel piping

95,000 man-hours
Man-hours

MORE AT HLINGENIEROS.COM/EN/PROJECTS/